

Room Scheduling System

RoomWizard™


Schedule
Share
Optimize



Captures Room Occupancy



Lights Indicate Room Availability



Reserve a Space from any Network Computer or Directly on the Display

RoomWizard™ is the first web-based system of touch-sensitive signs for scheduling rooms and other shared spaces.

“Where are we meeting?”

RoomWizard provides real-time, displayed meeting information, right where you need it — right outside the room. The interactive signs reduce meeting interruptions, eliminate scheduling conflicts and encourage more effective use of space.

Use your Space Wisely


Each RoomWizard sign displays its room's schedule: times, topics, meeting hosts, and more. Now you can see when the next meeting will start so you can wrap yours up effectively, instantly

eliminating scheduling conflicts. Bright red and green lights signal a room's availability from a distance – perfect for finding an impromptu meeting space or to avoid interrupting someone else's meeting. Use the touch screen to claim an unoccupied space or to extend or delete your reservation on the spot.

Filled to Capacity

RoomWizard's reporting function captures room occupancy and reservation patterns; providing insight into the needs and actual use of shared spaces.

RoomWizard Room Scheduling System: Focus on your meeting and maximize use of your space.

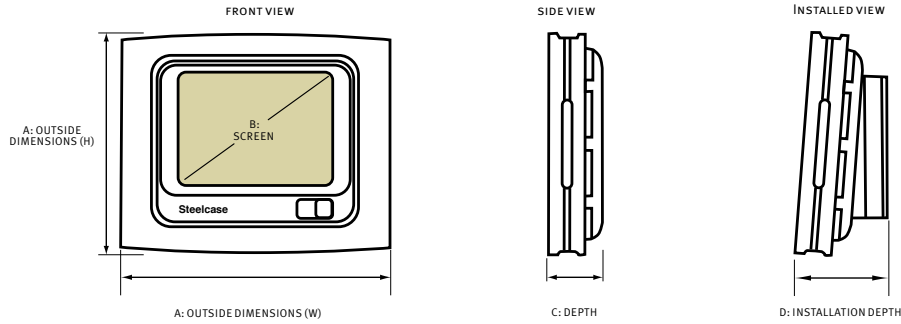

RoomWizard Room Scheduling System (RW10)	
Dimension A (HxW)	7.41" x 9.14" (188.2mm x 232.1mm)
Dimension B (Diagonal, Screen Size)	6.4" (162.6mm)
Dimension C (Depth)	2.0" (50.8mm)
Dimension D (Installation Depth)	3.31" (84.1mm)

Specifications

- Full-color backlit TFT with touchscreen
- Resolution: 640x480 pixels (VGA)
- Brightness: 250 milli candelas
- Viewing Angle: 90°
- Enclosure: Midnight black with satin aluminum cover
- Weight (packaged): 2.27 kg
- Lifetime: 50,000 hours in use at optimal brightness
- 433 MHz Geode LX processor
- 256 MB RAM
- 1 GB flash memory
- 10 Base-T/100 Base-T Ethernet via RJ45
- USB 2.0 port

Features

- Built in web server: Find and reserve an appropriate room from any network PC
- Interactive touchscreen: Adjust a room reservation, or grab a room for an impromptu meeting
- Indicator lights: Identify occupied and available rooms by a red or green light
- Synchronization: Choose to use RoomWizard with Microsoft Outlook or Lotus Notes calendar
- Start button: Automatically releases a room if occupants do not show up for the meeting
- Reporting: Capture room occupancy and reservation patterns and generate 36 different reports.
- One-Click Publishing: Email whiteboard notes to attendees when used with CopyCam or Impulse™ LTX whiteboard products
- SSL/SSH support
- Firmware updates via internet or USB

Power Source

- 120/240 Volts (AC) transformed to 9 Volts (DC)
- 36 Watts

Environmental

- Operating temperature 50° to 104° F (10° to 40° C)
- Operating humidity 20% to 80% (non-condensing)

Certification

- FCC Class A, CSA, NRTL, UL, CE, RoHS
- EN50082-1, EN 6100-4-2,3,4 Level 3,2,2, RoHS IEC801-2,3,4 Level 3,2,2

Warranty

- Two year limited warranty
- Extended warranty available

Accessories (Included)

- 18 gauge milled steel mounting bracket
- Drywall mounting hardware
- Anti-dislodgment feature built into the mounting bracket can be locked
- Power supply:
 - 6 foot (1.8m) power input cord
 - 3.5 foot (1.06m) low-voltage power output cord

Options

- Surface mount wire management kit (DTPWA01)
- Glass mount kit, includes wire management (RW GMK)
- Glass mount plate, no wire management (RW GMP)
- Lotus Domino Synchronization Driver (DTPRWS01)
- Microsoft Exchange Synchronization Driver (DTPRWS02)
- 100 foot (30m) power supply extension kit (RW PSE)
- Support for many third-party room scheduling software systems
- CopyCam image capture system (Model 80)
- Impulse LTX multimedia whiteboard (LTX 840, LTX 1240)

Authorized PolyVision Dealer

PolyVision Corporation
 1.800.620.POLY
 info@polyvision.com
 www.polyvision.com

POLYVISION
 A Steelcase Company